



## HIGH POWER HPRING UV

HIGH POWERFUL RING - 12 LEDS

▷ MACHINE VISION SYSTEM ▷ HIGH POWERFUL RING LIGHT ▷ ULTRAVIOLET ILLUMINATION ▷ OPTICAL BRIGHTENER ▷ QUALITY CONTROL WITH CAMERA

**POWERFUL DIRECTIVE LIGHTING,**  
**ADAPTED TO MOST CAMERAS.**




Composed of 12 high powerful 405 nm UV leds, the HPRING UV is obviously one of the most powerful lights among TPL Vision's products ranges. It is especially helpful for the direct lighting of circular areas, either in continuous mode or in strobe mode.

Its large internal diameter makes it the ideal partner for professional cameras, including those equipped with large lenses. The HPRING UV is specialized in the detection of UV optical brighteners: thanks to the HPRING UV, you can easily control the assembly defects, highlight the materials lacks and also read the UV markings.

### UV-INFO

In the light spectrum, UV (ultra violet) rays are electromagnetic radiations situated between 280 and 400 nm (visible radiations: between 400 and 800 nm). What makes UV very interesting is the fact that, even if it is invisible for the naked eye, it can be observed by fluorescence: when some bodies are submitted to UV wavelengths, they emit a visible light. This is the principle of black light and of counterfeit notes detection. TPL Vision only uses UV belonging to the UV-A range.

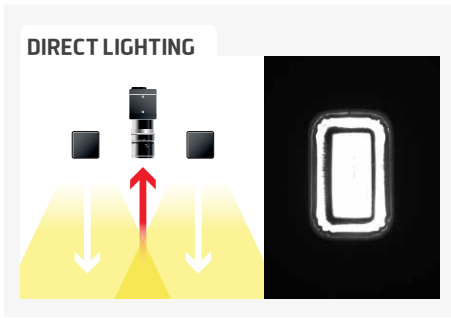

## TECHNICAL SPECIFICATIONS

Electronics	
Power supply	24 VDC +/-10%
Functioning mode	Continuous or strobe according to wiring
Maximum rising time	1.5 ms
Maximum falling time	1 ms
Wiring	M8 3 poles male connector
Max. Consumption	15 W
Optics	
Colour	UV 405
Number of Leds	12
Standard lens	$\pm 10^\circ$
Mechanics	
Dimensions	$\varnothing$ Int : 58 mm - $\varnothing$ Ext : 112 mm
Width	28 mm
Weight	400 g
Materials	Black anodized aluminum
Diffuser	Satin diffuser
Fixing	4 M3 screws
Environment	
Operating temperature	0 - 40°C
Storage temperature	0 - 60°C
IP protection	IP 40
Labels	RoHS-CE-DEEE

## RELATED PRODUCTS

Ask for your add-ons, customized for the High Power HPRING UV 405 :

- wiring
- safety glasses
- fixing hardware

## MY CONTACT

.....


.....

.....

.....

.....

## HOW TO BUILD YOUR REFERENCE

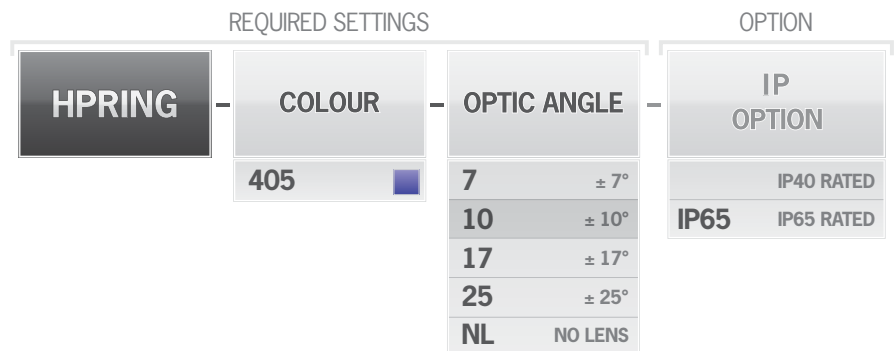


### EXAMPLES

HPRING LED UV 405  $\pm 10^\circ$  IP40 RATED:  $\Rightarrow$  HPRING-405-10  
 HPRING LED UV 405  $\pm 17^\circ$  IP65 RATED:  $\Rightarrow$  HPRING-405-17-IP65  
 HPRING LED UV 405  $\pm 25^\circ$  IP40 RATED:  $\Rightarrow$  HPRING-405-25

### RESULTS

**INFORMATION ABOUT LENSES**  
 NARROW ANGLE = GIVE PRIORITY TO LIGHTING POWER  
 WIDE ANGLE = GIVE PRIORITY TO HOMOGENEITY AND WIDE AREA



Features and presentations liable to modifications without prior notice. B-1 version, 2017/07 Edition

### TPL VISION UK

Brenchley House - School Road - Charing - Kent TN27 0JW - UK  
 Tel. +44 (0)1738 450 504 - contact@tpl-vision.co.uk

www.tpl-vision.com



### Other available documents :

- PDF, DWG, DXF, IGS, STEP & X\_Y DRAWINGS
- USER'S GUIDE

### HPRING UV 405

